




printhead cleaner built in your ribbon.

- Built right into your thermal transfer ribbons
- Preventative maintenance
- Fast and easy to use
- Maintains excellent print quality
- Prolongs printhead life
- Minimizes costly downtime

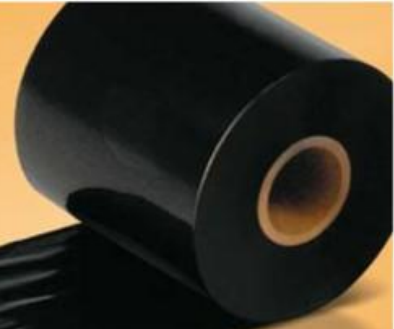

FAST WAX RESIN

Technical Specifications

Color Code Tab	Black
Print Speed	10 IPS
Film Thickness	4.5 Microns
Total Ribbon Thickness	10.0 Microns
Transmission Density	2.2
	MacBeth Scale
Ink Melting Point	75°C/167°F



Premium Wax/Resin

A Solid TTR Performer

Benefits

- Outstanding print quality on a wide range of substrates
- Stands up to rough handling, abrasion or moderate solvents
- Excellent durability
- Backcoat protects printhead

Recommended Stock

Coated and uncoated paper tag and label stocks
Polyethylene

Polyolefin
Polypropylene



What you need to know to quote ribbon business.

Thermal Transfer Ribbon STORAGE CONDITIONS

For optimal print results, thermal transfer printing should occur in the temperature range of 41° F to 95° F at 45% to 85% relative humidity. Suggested storage conditions for up to one year duration are 23° F to 104° F at 20% to 85% relative humidity. Exposing thermal transfer ribbons to direct sunlight or moisture will cause damage to the ribbons.



Ph: (800) 700-7377
Ph: (949) 888-3880
Fax: (949) 888-3883

ACCURATE IMAGING RESOURCES
22532 Avenida Empresa
Rancho Santa Margarita, CA 92688